


INSUL-LOCK® DS Flexible Closed Cell Pipe Insulation

Product Highlights

- ✓ Easy-to-install with precise fit
- ✓ Double-seal technology
 - Built-in pressure sensitive adhesive
 - Built-in PVC overlap tape with acrylic adhesive
- ✓ Scrim reinforcement on the seam surface
- ✓ Environmentally-friendly, CFC-free, flexible elastomeric thermal insulation
- ✓ Non-porous, fiber-free, and resistant to mold growth
- ✓ Resistant to moisture vapor flow
- ✓ Compatible with heating cable and tapes

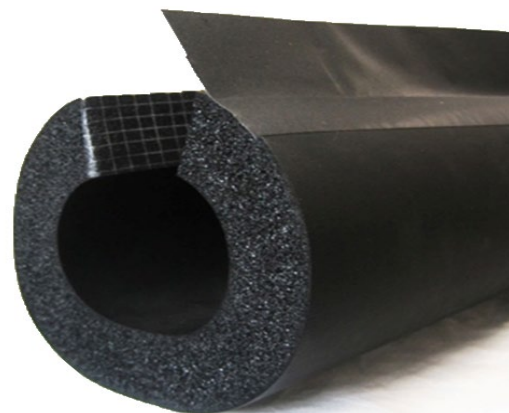

Specifications:

- Operating temperature range: -70°F (-57°C) to 220°F (104°C)
- R-value: 3
- Color: Black
- Length: 6.0' (1.8m)
- Thickness: 0.5" (1.3cm)
- Density: 3 to 6 PCF
- Water vapor permeability:
 - Dry cup (Elastomeric insulation): 0.03 perm - in
 - Wet cup (Glued seam with overlap): 0.12 perm - in
- Water absorption % (Volume change): 0

Applications:

- Freeze protection
- Prevent condensation on refrigerant lines, cold water plumbing, roof drains, and chilled water systems
- Many other outdoor and indoor applications

Ordering Information:

Part Number	Pipe Diameter
INSUL78	1/2"
INSUL118	3/4"
INSUL138	1"
INSUL158	1-1/4"
INSUL2	1-1/2"
INSUL2	1-3/4"
INSUL238	2"
INSUL258	2-1/4"
INSUL278	2-1/2"
INSUL318	2-3/4"
INSUL312	3"



Recommended Accessories:

Adhesive aluminum tape

For extra environmental protection.

Part #	Width	Length
INSFOIL-3	3" (76mm)	150' (46m)



DUCK® Duckling Duct Tape

Seal spaces between multiple pieces of insulation and prevent heat loss.

Part #	Width	Length
282309	0.75" (19mm)	180" (4.5m)