

ECONO Drum and Pail Heater

Product Highlights


- ✓ Economical choice for exceptional durability and flexibility for a wide range of metal drum heating applications
- ✓ Easy adjustable thermostat control displays both °F and °C
- ✓ Wide 3.6 in (91mm) silicone rubber band
- ✓ Patented grounded heating element meets NEC 427.23
- ✓ Moisture, chemical, and radiation resistant
- ✓ Heating element is laminated between two layers of 20mil fiberglass reinforced silicone rubber



Specifications:

- Adjustable Thermostat: Up to 425°F (218°C)[†]
- Voltage Options: 120VAC or 240VAC
- Exposure Temperature: -60°F to 450°F (-51°C to 232°C)
- Dielectric Strength: Over 2000 volts
- Silicone Rubber Density: 46.0 oz/yd² (1560 g/m²)
- Spring closure can be expanded 3" (76 mm)
- Power cord 6 ft (1.8 m) long
- 120V includes standard 3-prong plug (NEMA 5-15)
- 240V has crimped ferrule terminated leads
- Ingress Protection Rating: IP54

[†] If precise temperature control is required for your application, please contact BriskHeat or your local distributor for application assistance and product solutions.

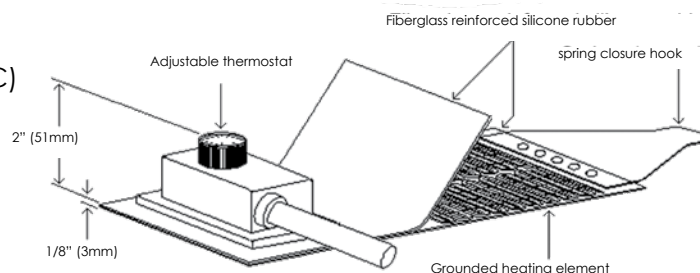

Ordering Information:

Size Gallon (Liter)	Diameter in (mm)	Total Wattage	Length in (mm)	Width in (mm)	Part Number	
					120VAC	240VAC
5 (19)	11.1 (282)	300	35.0 (889)	3.6 (92)	ECONO5-1	ECONO5-2
16 (61)	14.0 (355)	500	44.0 (1118)	3.6 (92)	ECONO15-1	ECONO15-2
30 (114)	18.6 (473)	750	58.5 (1486)	3.6 (92)	ECONO30-1	ECONO30-2
55 (208)	22.3 (566)	1100	70.0 (1778)	3.6 (92)	ECONO55-1	ECONO55-2

Accessories:

Part Number	Description
10180	Replacement spring for BriskHeat® Silicone Rubber Drum Heaters



10180: Replacement Spring